

# Architectural Door Accessories

**ASSA ABLOY**

## Pemko Commercial Threshold


The global leader in  
door opening solutions

Applies to the following products:

**1842\_S, 1842\_PK, 290\_SSTOP,  
290\_PKSTOP**

### Installation Instructions:

1. Carefully trim to fit within the stops of frame opening.
2. Trim seal 1/16" longer than trimmed stop at each end.
3. Position against door to assure proper seal (not too tight).
4. Fasten to threshold with #10 x 3/4" flat head self tapping machine screws.

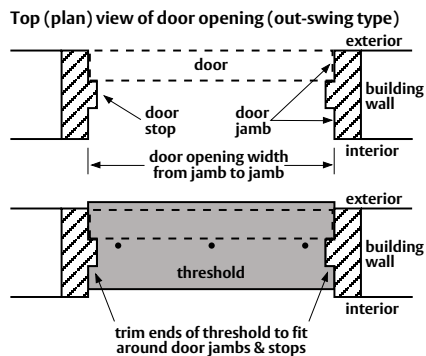


### Testing/Ratings:

Gasketing material for fire doors intended for application to listed steel frames and/or classified steel covered composite type, and hollow metal type fire doors rated up to 3 hours; wood and plastic covered composite type fire doors rated up to 1-1/2 hours; and wood core type fire doors rated up to 20 minutes. (Thresholds may or may not contain gasketing material).



Barrier-free with  
1/4" saddle only.

### Tools Required:



[www.pemko.com](http://www.pemko.com)

MEMPHIS, TN USA    VENTURA, CA USA    VANCOUVER, BC CA    TORONTO, ON CA  
P: 800 824-3018    P: 800 283-9988    P: 877 535-7888    P: 877 535-7888  
F: 800 243-3656    F: 800 283-4050    F: 877 535-7444    F: 877 535-7444

Copyright © 2017 Pemko Manufacturing Co., an ASSA ABLOY Group company. All rights reserved.  
Reproduction in whole or in part without the express written permission of Pemko Manufacturing Company is prohibited.

CT31\_WEBINS  
Rev 3 - 01.26.17  
Page 1 of 1